

TEST PROJECT ELECTRICAL INSTALLATIONS

WSC2017_TP18_Logo_functions_actual



**Function 1:**

Push S21: Door opens for 3 seconds and H21 is on during that time. Then door is stopped for 4 seconds. After that the door closes for 3 seconds and H23 is on during that time.

Function 2:

While door is opening S23 have no affect on function.

While door is closing S21 have no affect on function.

Function 3:

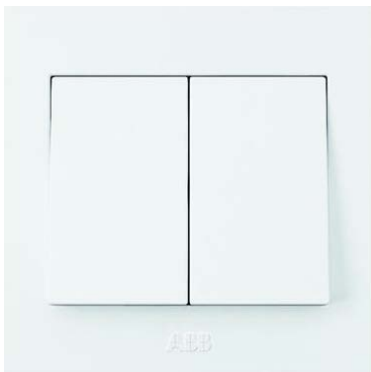
S22 stops door if it is opening or closing. If door is stopped S21 can restart opening process or door can be closed with S23.

Function 4:

H23 shall always flash (2hz) for 2 seconds before closing.

Function 5:

H22 is always on in auto mode.

**LOGO/KNX: 1**

S8:

Left switch:

Same function as S21 when ST1 is in auto.

Right switch:

Same function as S23 when ST1 is in auto.

LOGO/KNX: 2

Top light of H6 has the same function as H21.

Bottom light of H6 has the same function as H23